

PVRB Series

*Ultra-sensitive Back Pressure Regulator
Inlet & Outlet to 60 psig*

Index

PVRB Series	1
BP-3 Series	3
BP-60 Series	5
BPR30 Series	7
BP-66 Series	9
BPR21 Series	11



Features

- Low pressure control
- Full range capability
- Compatible with corrosive and non-corrosive gases & liquids
- Ultra-sensitive pressure regulator

Applications


- Chromatography
- Process stream sampling
- Bubbling operations
- Medical instrumentation
- Research laboratories
- Instrument calibration

Technical Data

Body Construction Material	Polyvinyl chloride
Spring Housing Materials	• PVRB2 & PVRB3: Polyvinyl chloride • PVRB4 & PVRB5: Aluminum alloy
Seat Material	Kel-F®
Diaphragm Material	PTFE
Adjustment Screw Material	Delrin®
Port Sizes	¼" NPT female
Pressure Ratings	Maximum control pressure: 60 psig (4 BAR)
Temperature Range	0° F to +125° F (-18° C to +52° C)
Flow Capacity	Cv = 0.011 maximum Orifice diameter = 0.025"
Weight	PVRB2 & PVRB3: 14 oz PVRB4 & PVRB5: 1.5 lbs
Leakage	Bubble-tight
Sensitivity	Less than ½ psi


Note: Proper filtration is recommended to prevent damage to sealing surfaces.

How it Works



Closed

With the unit spring load adjusted to the desired regulated "set" pressure, a dead-tight seal is affected against the applied upstream pressure.



Regulating

When the upstream process pressure (applied on the diaphragm) increases, an opposing force is generated which, through the diaphragm plate, acts against the "set" spring load.

As the increasing upstream pressure level reaches the "set" pressure, the poppet is gradually lifted off its seat. A consequent decrease in upstream pressure is experienced when the flowing fluid is relieved to the downstream side of the process at a faster rate than the upstream pressure can supply.

With decreasing upstream pressure, the spring force starts the poppet moving toward its closed position, thus maintaining the desired "set" pressure level within a narrow band.

When the upstream pressure has decreased to a level just below "crack", the adjusting spring load again creates a tight seal between the poppet and the sharp edge of the valve seat.



Circle Seal Controls

2301 Wardlow Circle • Corona, CA 92880
Phone (951) 270-6200 • Fax (951) 270-6201
www.circlesealcontrols.com


back pressure regulators

BP-3 Series


Dimensions

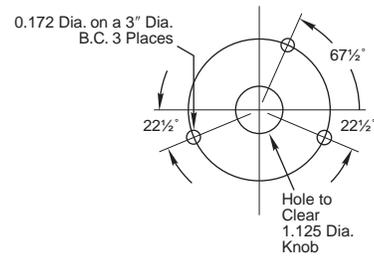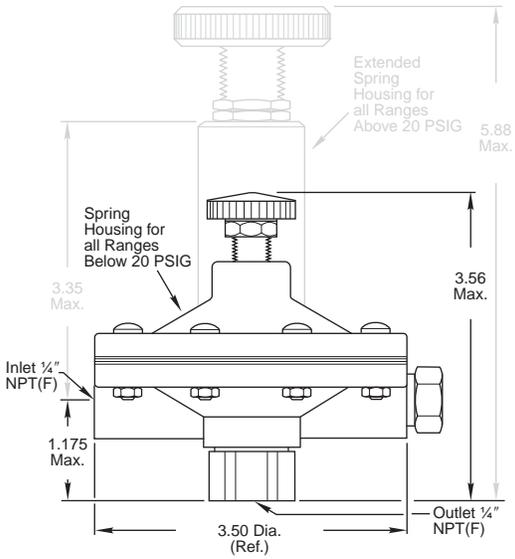


Panel Mounting for PVRB2 & PVRB3

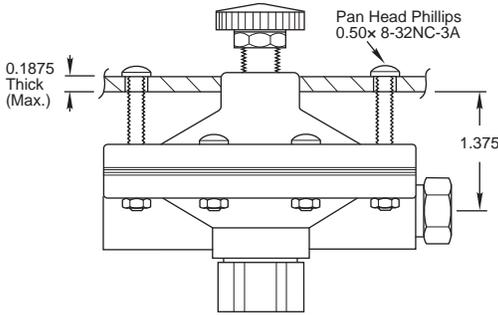

Panel Mounting for PVRB4 & PVRB5

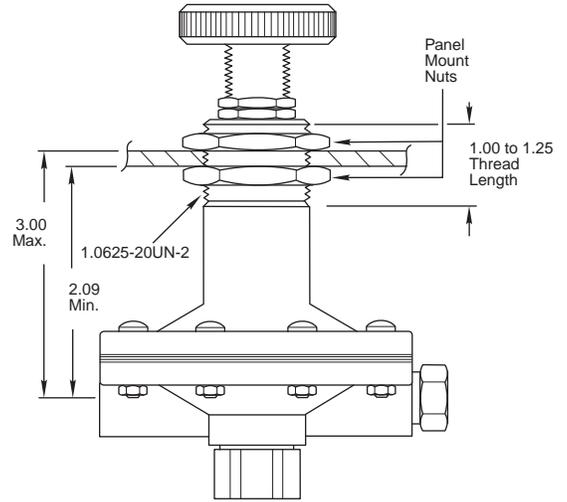

How to Order

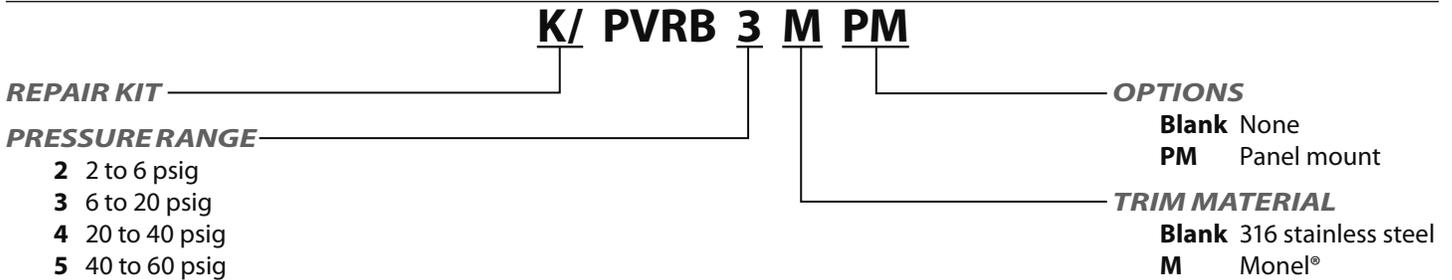

Note: if this regulator is to be used in oxygen service, specify "GENERAL OXYGEN SERVICE" when ordering or furnish the factory a copy of the special requirements.

Please consult your Circle Seal Controls distributor, representative, or the factory for information on special connections, operating pressures and temperature ranges.

For Your Safety

It is solely the responsibility of the system designer and user to select products suitable for their specific application requirements and to ensure proper installation, operation, and maintenance of these products. Material compatibility, product ratings and application details should be considered in the selection. Improper selection or use of products described herein can cause personal injury or property damage.

Kel-F® is a registered trademark of 3M Company.
 Delrin® is a registered trademark of DuPont.
 Monel® is a registered trademark of Special Metals Corporation.